















PRESSURISATION GARDENING AND IRRIGATION

REUSE OF RAINWATER

# E'L'POX WILII

#### **ONE OF A KIND**

Evidently it has a different appearance than any other booster set and is small and completely integrated. Once you install and use it, you realize that the real difference is in the comfort and performance. e.sybox mini<sup>3</sup> uses

the most advanced DAB technologies to create constant pressure according to the system demands

and thus an optimization of energy consumption. Suitable for use with potable water, in domestic systems and gardening applications.

The new 3-rotor model ensures further noise reduction and energy consumption.

Managing the water pressure in your home has never been so simple and quiet.







#### **APPLICATIONS**





Apartments up to 3 floors, 2 bathrooms and 50m<sup>2</sup> of garden.















**CERTIFICATIONS** 







**SUITABLE FOR PUMPING WATER FROM:** 








#### **OVERVIEW**

#### **CONSTANT PRESSURE**


#### FOR MAXIMUM COMFORT

Thanks to inverter technology, once you have set the desired pressure, e.sybox mini3 maintains a constant pressure to all the water outlets served.

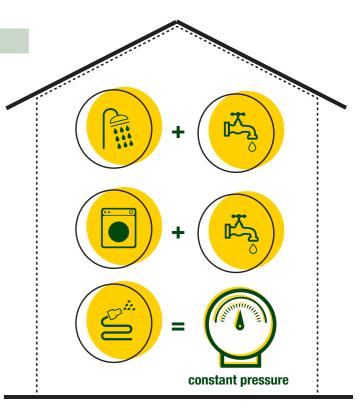


## **ULTRA LOW NOISE**

**DESIGNED FOR RELAXATION** 




PRESSURE\*









The special water cooled motor, the inverter, the sound absorbing hulls, and the anti-vibration legs make e.sybox mini3 booster set the second most quietest booster pump on the market after it's big brother e.sybox.



\*sound pressure measured at 1 meter distance in free field




# **OVERVIEW**

## **ENERGY SAVING**

## IN FIRST PLACE

Guarantees the comforts and savings of constant pressure (Set Point adjustable from 1 to 5.5 bar) in the system and up to 120 euros a year\* saving on energy bills thanks to the inverter technology.

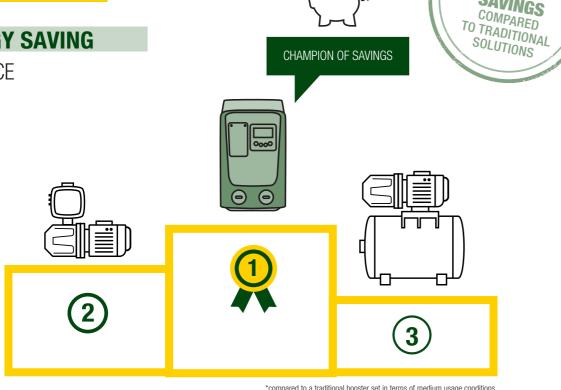



\*compared to a traditional booster set in terms of medium usage conditions.

## **MINIMUM FUSS**

#### MAX COMPACTNESS

The new component architecture and ergonomic design make e.sybox mini<sup>3</sup> so compact that it can be installed in any environment, even under the kitchen sink.

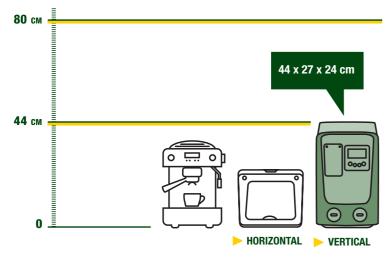



**UP TO 50%** 

ENERGY SAVINGS






### **OVERVIEW**

#### **INTERGRATED**

#### ALL IN 1

Once the suction and delivery pipes are connected, e.sybox mini3 doesn't require any additional components for it's installation and operation.

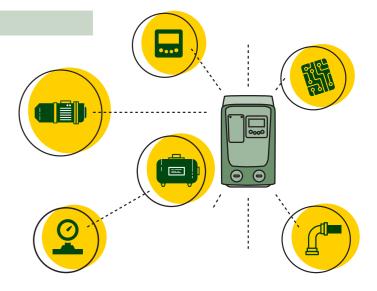

#### **DISPLAY**

#### **EASY ADJUSTMENT**

LCD 70X40 mm high-resolution screen, adjustable to adapt the readability at various installations. The intuitive interface gives access to all the system information and the main settings depending on the specific application.





# **WIRELESS**

#### ON BOARD

Thanks to the integrated wireless capability, e.sybox mini3 can be connected to the Internet.






## **MAXIMUM VERSATILITY**


#### **3** INSTALLATION POSITIONS

Horizontal, vertical or wall mounted. e.sybox mini3 can be installed virtually anywhere inside or outside the home.














**OUTSIDE** with e.sycover



# **DIMENSIONS ARE IMPORTANT**

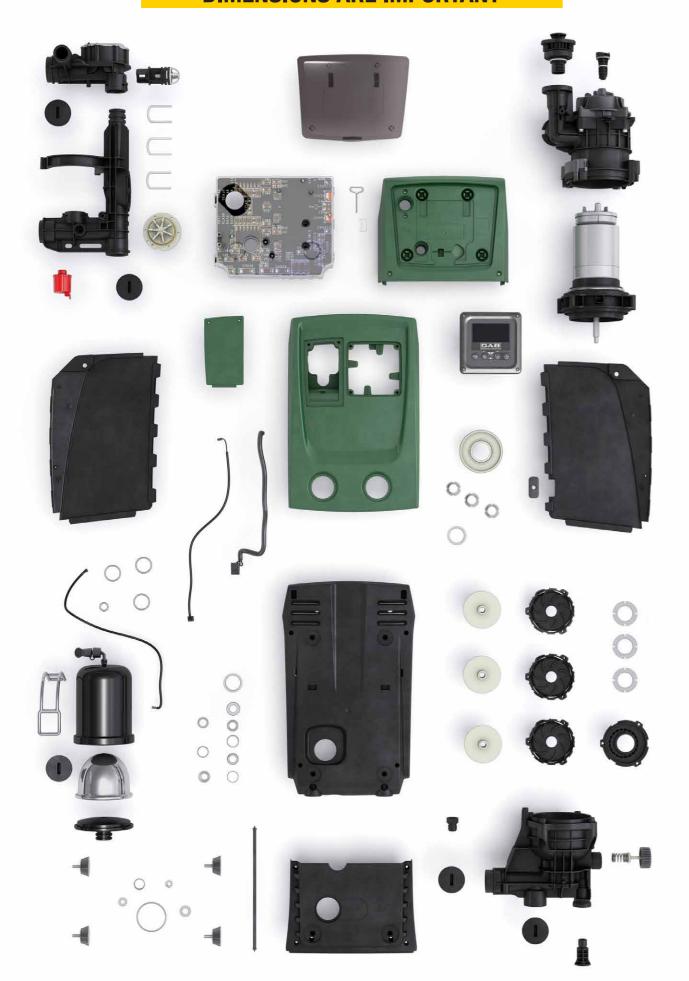

# **FEATURES**



#### INVERTER

Thanks to the inverter technology, e.sybox mini3 absorbs only the necessary energy required. increasing the sensitive economic savings.



Special water cooled motor design eliminates noise generated by the fans traditional cooling.



# NON RETURN VALVE ON DELIVERY

Easy to remove for routine maintenance



# CONNECTIONS -FLEXIBILITY OF INSTALLATION

Allows you to choose which system inlets and outlets to use depending on your installation needs.



#### TECHNICAL COMPARTMENT

Easy access to the expansion tank air valve adjustment and the non return valve for quick cleaning or maintenance.



#### 1 LITRE EXPANSION TANK

Guaranteed for 5 years without any maintenance requirements. Certified for drinking water.



FLOW AND PRESSURE SENSORS

integrated flow sensor.

Electronic pressure transducer and

# **ANTI-VIBRATION FEET**

Guarantees effective absorption of vibrations helping e.sybox mini<sup>3</sup> to further reduce the operation noise.











# Erchpox

#### THE FIRST OF ITS KIND

We didn't just limit ourselves on improving what was already there! Instead we were the first to achieve a revolutionary innovation in water pressure boosting. We have developed a patented booster set with high performance and increased efficientcy. Compact design that is simple to install, maintain and operate. Maximum satisfaction for the installer and end user.

e.sybox has changed the way in which people use our most important resource, water.

e.sybox is also smart and versatile. You can create multi pump systems by grouping two or up to four pumps together. This has never been so easy, thanks to fast connection station e.sytwin and the integrated wireless connection.









#### **APPLICATIONS**

#### **CERTIFICATIONS**

#### **SUITABLE FOR PUMPING WATER FROM:**



e.sybox









e.sytwin


















# **OVERVIEW**

### **CONSTANT PRESSURE**

#### FOR MAXIMUM COMFORT




Thanks to inverter technology, once you have set the desired pressure, e.sybox mini3 maintains a constant pressure to all the water outlets served.

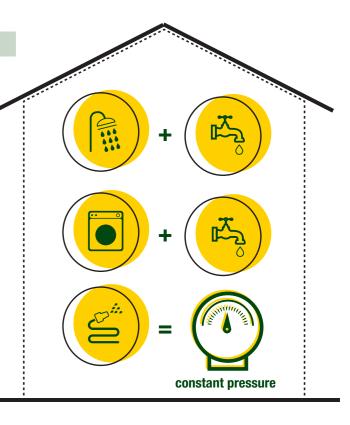

# **EVEN QUIETER**

#### YOU ONLY HEAR THE FLOWING OF WATER

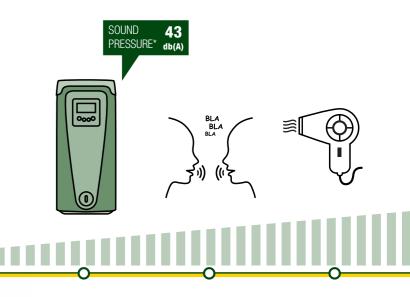



Thanks to the experience gained over the years, we have further optimized e.sybox making it even more quiet and comfortable.

\*sound pressure measured at 1 meter distance in free field





Houses and small apartment

maximum of 9 apartments.

complexes up to 6 floors and a





Small and large apartment

maximum of 17 apartments.

complexes up to 9 floors and a











RAINWATER


**COLLECTION TANKS** 

#### **OVERVIEW**

# **ENERGY SAVINGS**

### OLYMPIC MEDAL LINE

Guarantees the comforts and savings of constant pressure (Set Point adjustable from 1 to 5.5 bar) in the system and up to 250 euros a year\* saving on energy bills with e.sytwin up to 1,000 euros a year\*, thanks to the inverter technology.

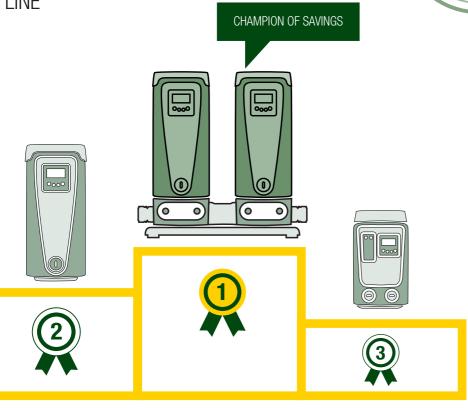


\*compared to a traditional booster set in terms of medium usage conditions

#### **MINIMUM FUSS**

#### MAX COMPACTNESS

The new component architecture and the ergonomic design make e.sybox so compact, it can be installed in nearly any environment. It guarantees a dimension reduction of at least 30% compared to any other traditional pump system.

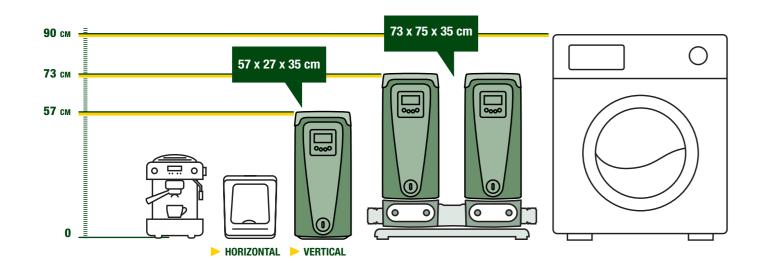

## **OVERVIEW**

#### **INTEGRATED**

#### ALL IN 1

Once the suction and delivery pipes are connected, e.sybox doesn't require any additional components for it's installation and operation.



# **DISPLAY**

#### COMMUNICATE WITH E.SYBOX


LCD 70X40 mm high-resolution screen, adjustable to adapt the readability at various installations. The intuitive interface gives access to all the system information and the main settings depending on the specific application.






#### **WIRELESS**

ON BOARD







Thanks to the equipped wireless connection is possible to create groups of two to four pumps and can be connected to the intertet.

## **MAXIMUM VERSATILITY**


#### **3** INSTALLATION POSITIONS

Horizontal, vertical or wall mounted. e.sybox can be installed virtually anywhere inside or outside the home.

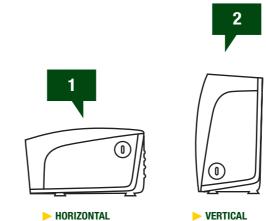

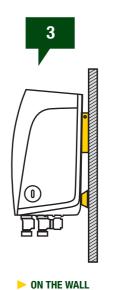

with e.sywall

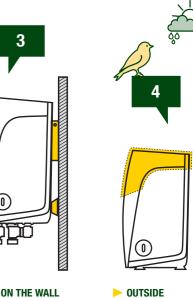

with e.sycover

**UP TO 50%** 

ENERGY SAVINGS

COMPARED TO TRADITIONAL SOLUTIONS

# **EFFICIENT HIGH PERFORMANCE**



# **FEATURES**



#### INVERTER

Thanks to the inverter technology, e.sybox absorbs only the necessary energy required. increasing the sensitive economic savings.



Special water cooled motor design eliminates noise generated by the fans traditional cooling.



#### NON RETURN VALVE ON DELIVERY

Easy to remove for routine maintenance



#### CONNECTIONS -FLEXIBILITY OF INSTALLATION

Allows you to choose which system inlets and outlets to use depending on your installation needs.



#### TECHNICAL COMPARTMENT

Easy access to the expansion tank air valve adjustment and the non return valve for quick cleaning or maintenance.



#### 2 LITRE EXPANSION TANK

Guaranteed for 5 years without any maintenance requirements. Certified for drinking water.



#### FLOW AND PRESSURE SENSORS

Electronic pressure transducer and integrated flow sensor.



#### **ANTI VIBRATION FEET**

Guarantees effective absorption of vibrations helping e.sybox to further reduce the operation noise.











# **ACCESSORIES**

# **MODULARITY IN FIRST PLACE**

The innovative range of e.syline accessories, further increases the possibilities of installing e.sybox booster set is now the most versatile and innovative on the market. A suite of integrated solutions that cover all your needs in terms of performance and conditions of use.

# **Quick connect base**









Complete docking station for e.sybox with all the necessary interfaces for connection to the system including anti-vibration feet.

Thanks to 4 possible hydraulic configurations, installation becomes even more rapid and flexible. In case of maintenance, e.sydock allows the quick disconnection of e.sybox helping to reduce maintenance down

# **Quick connect station for** groups with two e.sybox









It offers outstanding performance with the ability to combine operations, with reduced dimensions of 50% compared to any other equivalent traditional system. E.sytwin allows you to fully exploit the potential of e.sybox in the creation of sets with two pumps.












# Wall installation





Suitable for both e.sybox and e.sybox mini3.





# Water storage tank ready for use

# EJYTANK

480 litre tank provided with e.sydock for quick installation. It is suitable for potable water and is equipped with filling valve from the water supply (complies with UNI EN 1717), with AG type overflow system, suction hose with bottom valve and discharge hose.

The tank is suitable for installation above ground and the four slots on the base facilitate the fixing to the ground. It is equipped with direct discharge from

The system is modular with the ability to install additional tanks on three sides (laterally and to the







# **Outside** installation

# EJUCOVE

Suitable for both e.sybox and e.sybox mini<sup>3</sup>.















EJULINE



# **SELECTION TABLE**


		WATER PRESSURE			IRRIGATION	
	MAXIMUM NUMBER OF FLOORS	SMALL SIZE APARTMENT with 1 bathroom  (6* )  MAXIMU	MEDIUM SIZE APARTMENT with 2 bathrooms (10* )	LARGE SIZE APARTMENT with 2 bath. plus a garden (15* 🔼 )  TMENTS	STATIC SPRINKLERS RANGE 4 M Capacity: 6l/min Working pressure: 2.4 bar	DYNAMIC SPRINKLER RADIUS 14 M Capacity: 201/min Working pressure: 3.4bar
e.rybox mini³	1	2	2	1	8	-
	2	2	2	1		
	3	2	1	1		
e.rybox	1	9	5	4	16	4
	2	8	5	4		
	3	7	5	4		
	UP TO 6	6	3	-		
	1	16	10	6	-	7
	UP TO 3	16	10	6		
	4	15	9	5		
	5	14	8	5		
	6	12	7	5		
€````ĊŢŢſĬŨ	UP TO 8	11	6		e values Thoroughly analyze the	


\*The table is indicative and it is based on average values. Thoroughly analyze the specific plant for optimal sizing.


# **TECHNICAL DATA**

OPERATING RANGE: flow rate up to 80l/min; head up to 55m  PUMPED LIQUID: clean, free from solids or abrasive substances, non viscous, non aggressive, non crystallized and not chemically neutral  LIQUID TEMPERATURE RANGE: from 0°C to + 35°C for domestic use and from 0°C + 40°C for other uses  MAXIMUM SUCTION DEPTH: 8 meters  MAXIMUM AMBIENT TEMPERATURE: +50°C  MAXIMUM WORKING PRESSURE: 7,5 bar (750 kPa)  8 bar (800 kPa)  IPX4 (without e.sycover fitted)  INSULATION CLASS:		E". Apo× wi⊔i₃	e.rdpox			
LIQUID TEMPERATURE RANGE: from 0°C to + 35°C for domestic use and from 0°C + 40°C for other uses  MAXIMUM SUCTION DEPTH: 8 meters  MAXIMUM AMBIENT TEMPERATURE: +50°C  MAXIMUM WORKING PRESSURE: 7,5 bar (750 kPa) 8 bar (800 kPa)  MOTOR PROTECTION: IPX4 (without e.sycover fitted)	OPERATING RANGE:	flow rate up to 801/min; head up to 55m	flow up to 120I/min; head up to 65m			
MAXIMUM SUCTION DEPTH:  8 meters  MAXIMUM AMBIENT TEMPERATURE: +50°C  MAXIMUM WORKING PRESSURE: 7,5 bar (750 kPa) 8 bar (800 kPa)  MOTOR PROTECTION:  IPX4 (without e.sycover fitted)	PUMPED LIQUID:	clean, free from solids or abrasive substances, non viscous, non aggressive, non crystallized and not chemically neutral				
MAXIMUM AMBIENT TEMPERATURE: +50°C  MAXIMUM WORKING PRESSURE: 7,5 bar (750 kPa) 8 bar (800 kPa)  MOTOR PROTECTION: IPX4 (without e.sycover fitted)	LIQUID TEMPERATURE RANGE:	from 0°C to + 35°C for domestic use and from 0°C + 40°C for other uses				
MAXIMUM WORKING PRESSURE: 7,5 bar (750 kPa) 8 bar (800 kPa)  MOTOR PROTECTION: IPX4 (without e.sycover fitted)	MAXIMUM SUCTION DEPTH:	8 meters				
MOTOR PROTECTION: IPX4 (without e.sycover fitted)	MAXIMUM AMBIENT TEMPERATURE:	+50°C				
(	MAXIMUM WORKING PRESSURE:	7,5 bar (750 kPa)	8 bar (800 kPa)			
INSULATION CLASS:	MOTOR PROTECTION:	IPX4 (without e.sycover fitted)				
•	INSULATION CLASS:	F				

# **PERFORMANCE DATA**

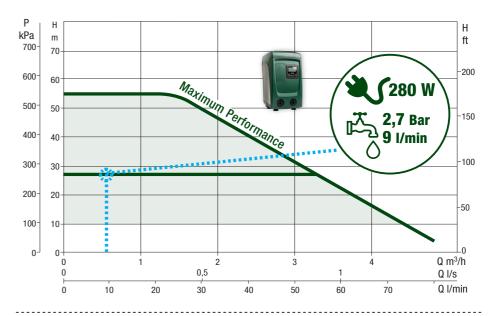

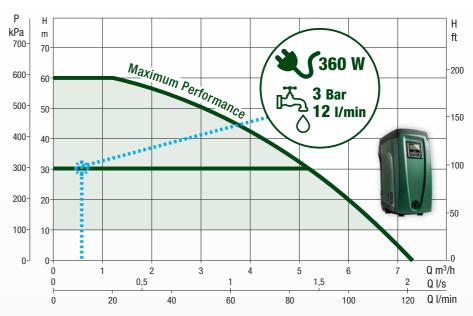

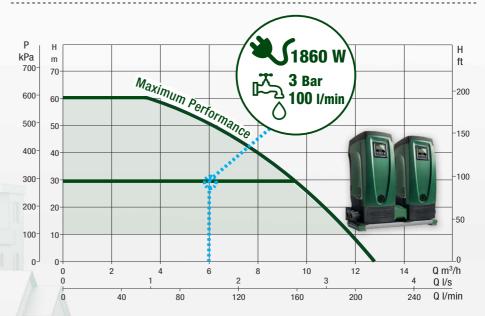



#### DAB PUMPS LTD.

Unit 4 and 5, Stortford Hall Industrial Park, Dunmow Road, Bishops Stortford. Herts <u>CM23</u> 5GZ - UK salesuk@dwtgroup.com Tel. +44 1279 652 776 Fax +44 1279 657 727



#### DAB PUMPS B.V.

Brusselstraat 150 B-1702 Groot-Bijgaarden - Belgium info.belgium@dwtgroup.com Tel. +32 2 4668353 Fax +32 2 4669218



#### DAB PUMPS B.V.

Albert Einsteinweg, 4 5151 DL Drunen - Nederland info.netherlands@dwtgroup.com Tel. +31 416 387280 Fax +31 416 387299



#### DAB PUMPEN DEUTSCHLAND GmbH

Tackweg 11 D - 47918 Tönisvorst - Germany info.germany@dwtgroup.com Tel. +49 2151 82136-0 Fax +49 2151 82136-36



#### DAB PUMPS IBERICA S.L.

Calle Verano 18-20-22 28850 Torrejón de Ardoz - Madrid Snain info.spain@dwtgroup.com Tel. +34 91 6569545 Fax: +34 91 6569676



#### DAB PRODUCTION HUNGARY KFT.

Nagykanizsa, Buda Ernó u.5 Hungary Tel. +36 93501700



#### DAB PUMPS POLAND Sp. z o.o.

Mokotów Marynarska ul. Postępu 15C 02-676 Warszawa - Poland polska@dabpumps.com.pl Tel. +48 223 816 085



#### **DAB UKRAINE Representative Office**

Regus Horizon Park 4 M. Hrinchenka St. suit 147 03680 Kiev - Ukraine Tel. +38 044 391 59 43



#### 000 DAB PUMPS

Novgorodskaya str. 1, block G office 308, 127247, Moscow - Russia info.russia@dwtgroup.com Tel. +7 495 122 0035 Fax +7 495 122 0036



#### DAB PUMPS INC.

3226 Benchmark Drive Ladson, SC 29456 - USA info.usa@dwtgroup.com Tel. 1-843-824-6332 Toll Free 1-866-896-4DAB (4322) Fax 1-843-797-3366



#### DWT SOUTH AFRICA

Podium at Menlyn, 3rd Floor, Unit 3001b, 43 Ingersol Road, C/O Lois and Atterbury street, Menlyn, Pretoria, 0181 - South-Africa info.sa@dwtgroup.com Tel. +27 12 361 3997 Fax +27 12 361 3137



#### DAB PUMPS CHINA

No.40 Kaituo Road, Qingdao Economic & Technological Development Zone Qingdao City, Shandong Province - China PC: 266500 info.china@dwtgroup.com Tel. +8653286812030-6270

Fax +8653286812210



#### DAB PUMPS DE MÉXICO, S.A. DE C.V.

Av Gral Álvaro Obregón 270, oficina 355 Hipódromo, Cuauhtémoc 06100 México, D.F. Tel. +52 55 6719 0493



#### DAB PUMPS OCEANIA PTY LTD

L1 181 Bay Street - Brighton, Melbourne - VIC 3186 - Australia info.oceania@dwtgroup.com Tel. +61 (03) 9595 3841

